


FFT Spectrum Analyzers

SR785 — 100 kHz, 2-channel dynamic signal analyzer

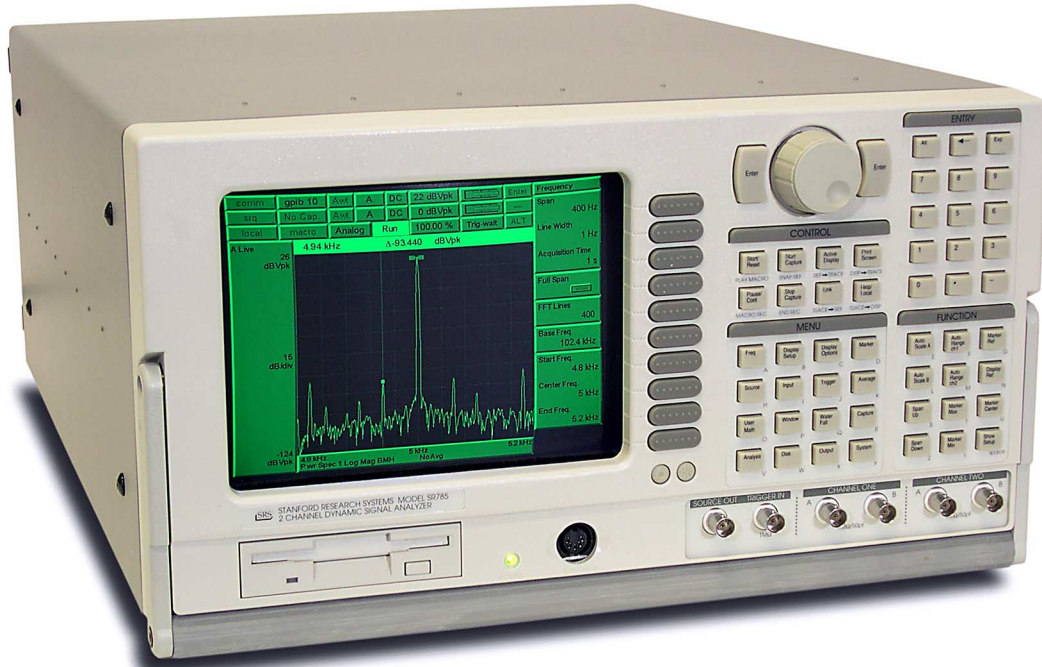

SR785 Dynamic Signal Analyzer

- **DC to 102.4 kHz bandwidth**
 - **90 dB dynamic range**
 - **Low-distortion synthesized source**
 - **145 dB dynamic range in swept-sine mode**
 - **Order tracking**
 - **20 pole/zero curve fitting**
 - **Real-time octave analysis**
 - **Up to 32 Mbyte memory**
 - **GIF, EPS, PCX, HP-GL graphics output**
 - **GPIB and RS-232 interfaces**
- **SR785 ... \$11,950 (U.S. list)**

The SR785 Two Channel Dynamic Signal Analyzer is a precision, full-featured signal analyzer that offers state-of-the-art performance and a wide selection of features at a price that's less than half that of competitive analyzers. Building on its predecessor, the SR780, the SR785 incorporates new firmware and hardware that make it the ideal instrument for analyzing both mechanical and electrical systems. For measurements involving servo systems, control systems, acoustics, vibration testing, modal analysis or machinery diagnostics, the SR785 has the features and specifications to get the job done.

Standard measurement groups include FFT, order tracking, octave, swept-sine, correlation, time capture and time/histogram. The SR785 brings the power of several instruments to your application: a spectrum analyzer, network analyzer, vibration analyzer, octave analyzer and oscilloscope.

A unique measurement architecture allows the SR785 to function as a typical dual-channel analyzer with measurements like cross spectrum, frequency response, coherence, etc. Alternatively, the instrument can be configured so that each input channel functions as a single-channel analyzer with its own span, center frequency, resolution and averaging. This allows you to view a wide band spectrum and simultaneously zoom in on spectral details. The same advanced architecture provides storage of all measurement building blocks and averaging modes. Vector averaged, rms averaged, unaveraged and peak hold versions of all

measurements are simultaneously acquired and can be displayed without re-taking data.



Narrow band FFT (top), wide band FFT (bottom)

Averaging


The SR785 comes equipped with a wide selection of averaging techniques to improve your signal-to-noise ratio. Choose rms averaging to reduce signal fluctuations, vector averaging to actually eliminate noise from synchronous signals, or peak hold averaging. In the order tracking measurement group, time averaging is available. Both linear and exponential averaging are provided for each mode.

Because the SR785 is so fast, there's no need for a separate "fast averaging" mode. For instance, in a full-span FFT measurement with a 4 ms time record, 1000 averages take exactly 4 seconds, during which the SR785 still operates at its maximum display rate.

For impact testing, the average preview feature allows each time record or spectrum to be accepted or rejected before adding it to the measurement.

Order Tracking

Order tracking is used to evaluate the behavior of rotating

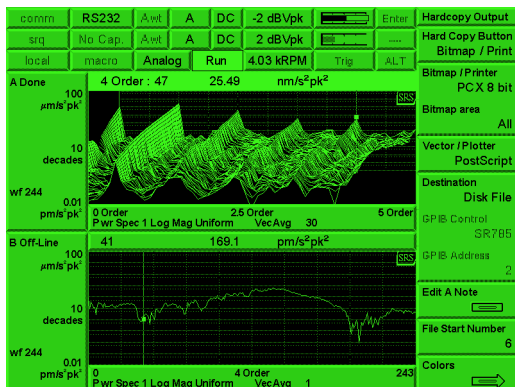


Order map (top), tracked order (bottom)

machinery. Measurement data is displayed as a function of multiples of the shaft frequency (orders), rather than absolute frequency. Combined with a waterfall plot, the SR785 provides a complete history or "order map" of your data as a function of time or rpm. Using the slice feature, the amplitude profile of specific orders in the map can be analyzed.

In tracked order mode, the intensity of individual orders vs. rpm is measured. Unlike other analyzers, there's no need to track a limited number of orders to ensure full speed measurements. The SR785's speed allows simultaneous tracking of up to 400 orders.

Run-up and run-down measurements are available in both polar and magnitude/phase formats. RPM profiling is provided to monitor variations of rpm as a function of time. A complete selection of time and rpm triggering modes is included allowing you to make virtually any rotating machinery measurement.

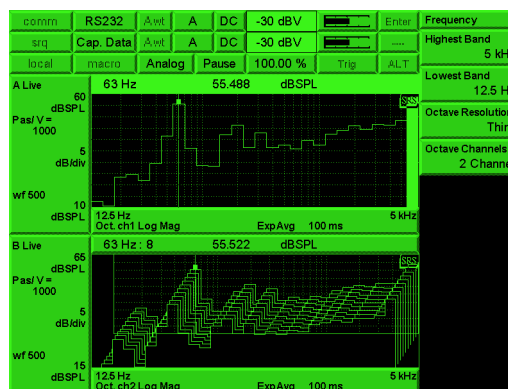

Octave analysis


Octave Analysis

Real-time 1/1, 1/3 and 1/12 octave analysis, at frequencies up to 40 kHz (single channel) or 20 kHz (dual channel), is a standard feature of the SR785. Octave analysis is fully compliant with ANSI S1.11-1986 (Order 3, type 1-D) and IEC 225-1966. Switchable analog A-weighting filters as well as A, B and C weighting math functions are included. Averaging choices include exponential time averaging, linear time averaging, peak hold and equal confidence averaging. Broadband sound level is measured and displayed as the last band in the octave graph. Total power, impulse, peak hold and L_{eq} are all available. Exponentially averaged sound power (L_{eq}) is calculated according to ANSI S1.4-1983, Type 0.

Octave displays can be plotted as waterfalls with a fast 4 ms storage interval. Once data is stored in the waterfall buffer, the SR785 can display centile exceedance statistics for each 1/1, 1/3 or 1/12 octave band as well as for L_{eq} .

Swept-Sine Measurements

Swept-sine mode is ideal for signal analysis that involves high dynamic range or wide frequency spans. Gain is optimized at

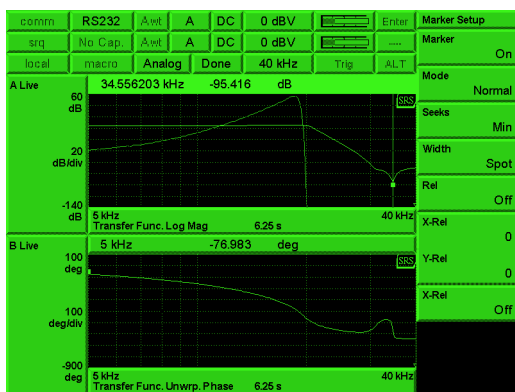

Swept-sine Bode plot of LPF response

each point in the measurement producing up to 145 dB of dynamic range. A frequency resolution of up to 2000 points is also provided. Auto-ranging can be used with source auto-leveling to maintain a constant input or output level at the device under test (to test response at a specific amplitude, for instance).

Auto-resolution ensures the fastest possible sweeps and adjusts the frequency steps in the scan based on the DUT's response. Phase and amplitude changes that exceed user-defined thresholds are measured with high frequency resolution, while small changes are measured using wider frequency steps between points. A choice of linear sweeps with high resolution, or logarithmic sweeps with up to eight decades of frequency range is provided.

Time/Histogram

Use the time/histogram measurement group to analyze time domain data. A histogram of the time data vs. signal amplitude is provided for accurate time domain signal characterization. Statistical analysis capabilities include both probability density function (PDF) and cumulative density function (CDF). The sample rate, number of samples and number of bins can all be adjusted.

Time Capture

The SR785 comes with 8 Mbytes of memory (32 Mbytes optional). Analog waveforms can be captured at sampling rates of 262 kHz or any binary sub-multiple, allowing you to optimize sampling rate and storage for any application. For example, 8 Msamples of memory will capture 32 seconds of time domain data at the maximum 262 kHz sample rate, or about 9 hours of data at a 256 Hz sample rate. Once captured, any portion of the signal can be played back in any of the SR785's measurement groups except swept-sine. The convenient Auto-Pan feature lets you display measurement results synchronously with the corresponding portion of the capture buffer to identify important features.

Unit Conversion


Automatic unit conversion makes translating transducer data easy. Enter your transducer conversion directly in V/EU, EU/V or dB (1V/EU). The SR785 will display the result in

units of meters, inches, m/sec², in/sec², m/s, in/s, mil, g, kg, lbs., N, dynes, pascals or bars. Built-in ICP power means you don't need an external power supply for your accelerometer. Acoustic measurement results can be displayed in dB SPL, while electrical units include V, V², dBV and dBm.

Source

The SR785 comes standard with six precision source types. Generate low-distortion (-80 dBc) single or two-tone sine waves, white noise, pink noise, chirps, and arbitrary waveforms. The chirp and noise sources can be bursted to provide activity over a selected portion of the time record for FFT measurements, or to provide impulse noise for acoustic measurements. The digitally synthesized source produces output levels from 0.1 mV to 5 V plus DC offset from 0 to ±5 V, and delivers up to 100 mA of current.


Arbitrary waveform capability is standard with the SR785. Use the arbitrary source to playback a section of a captured waveform, play a selected FFT time record or upload your own custom waveform from your computer.

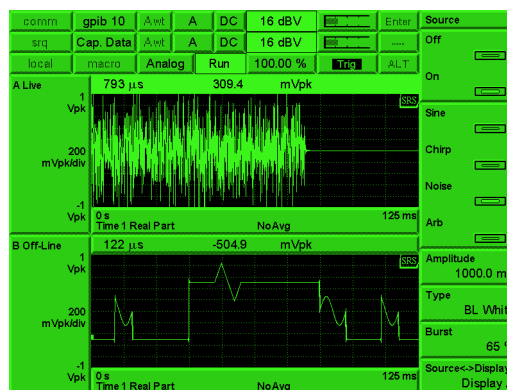

Burst noise source (top), arbitrary waveform source (bottom)

User Math

Create your own measurement in each of the SR785's measurement groups using the math menu. Enter any equation involving rms averaged, vector averaged or unaveraged time

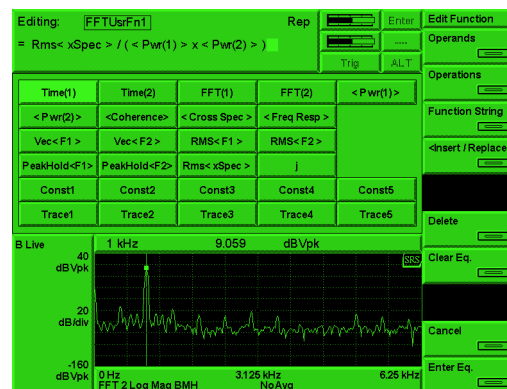


User Math

or frequency data, stored files, constants, or a rich array of supplied operations including arithmetic functions, FFT, inverse FFT, $j\omega$, $d/d\omega$, exp, ln x and many others. Because all the averaging modes are available as user math operands, non-repeatable runout measurements, for example, which are used in analyzing disk drives, can be performed in a single pass by entering the equation $MAG(RMS<F1>)-MAG(VEC<F1>)$. Unlike many other analyzers, the SR785's measurement rate is virtually unaffected when user math is selected. For instance, the function $\exp(\ln(\text{conj}(FFT2/FFT1)))$ can be calculated with a 100 kHz real-time bandwidth.

Waterfall

Waterfall plots are a convenient way of viewing a time history of your data. Each successive measurement record is plotted along the z-axis making it easy to see trends in the data. All FFT, octave and order tracking measurements can be stored in the SR785's waterfall buffer memory. You can choose to save all measurements and averaging modes or just the current measurement to conserve memory. Waterfall traces can be

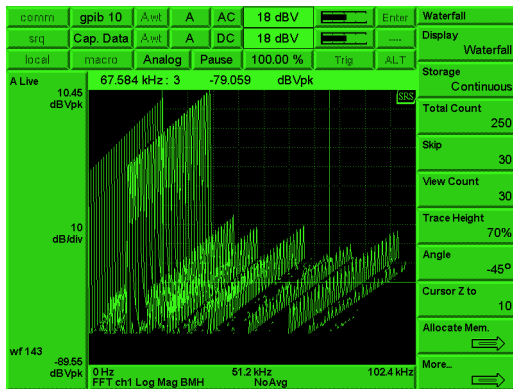

Waterfall plot

stored every n time records for FFT and order tracking measurements. For order tracking measurements, new records can be acquired at a specific time interval or change in rpm. In octave measurements, the storage interval is in seconds (as fast as every 4 ms). While displaying waterfall plots, you can adjust the skew angle to reveal important features, or change the baseline threshold to eliminate low-level clutter. Any z-axis slice or x-axis record can be saved to disk or displayed separately for analysis.

Analysis

The SR785 includes a wide variety of analysis features. Marker analysis lets you measure the power contained in harmonics, sidebands or within a given band of frequencies. Important information such as THD, THD+N, sideband power relative to a carrier, or total integrated power are calculated in real time and displayed on the screen. The front/back display feature allows you to view live data from both signal inputs on one graph. You can also simultaneously display saved traces and live data. The peak-find marker allows you to quickly



Total harmonic distortion (THD)

locate frequency peaks with the click of a button. The marker statistics feature calculates the maximum, minimum, mean and standard deviation of data in any section of the display. For modal analysis, the cursor can be configured to display the resonant frequency and damping of a single selected mode.

Use data tables to display up to 100 selected data points in tabular format. Limit tables let you to define up to 100 upper and lower limit segments in each display for GO/NO-GO testing.

Curve Fit and Synthesis

The SR785 has a standard 20-pole, 20-zero curve fitter that can fit frequency domain data from both the FFT and swept-sine measurement groups. Curve models can be displayed in pole/zero, pole/residue and polynomial formats. Synthesis reverses the process: enter a model in any of the above formats and the SR785 synthesizes the required curve. The curve fit/synthesis menu allows you to change gain, delay and frequency scale, set pole and zero locations and instantly see the response of the modeled system.

Output

The SR785's 3.5" disk drive, computer interfaces (GPIB and RS-232) and printer port provide flexibility when saving, printing and exporting data. Data can be saved in binary or ASCII formats, and displays can be printed/plotted to any of the ports or the disk drive. Supported formats include PCL (LaserJet/DeskJet), dot-matrix, postscript, HP-GL, PCX or GIF. An annotation editor lets you add text, time, date and file names to any part of the plot.

Data Conversion Utilities

The SR785 contains a complete suite of data conversion utilities for both Windows and DOS operating systems. SR785 files can be converted to ASCII for use with spreadsheets, or Universal File Format (UFF) and HP SDF for use with modal analysis programs. SR785 Files can also be converted to MAT file format for use with MATLAB. Conversion from external file types is also supported. Both HP SDF and SR780 files can be converted to SR785 format.

Instrument Modes

FFT, Time/Histogram, Correlation, Octave, Swept-Sine, Order Tracking

Frequency Domain Measurements

Frequency Response, Linear Spectrum, Cross Spectrum, Power Spectrum, Coherence, Power Spectral Density

Time Domain Measurements

Time Record, Cross-Correlation, Auto-Correlation, Orbit

Amplitude Domain Measurements

Histogram, PDF, CDF

FFT Resolution

100, 200, 400, 800 lines

Views

Linear Magnitude, Log Magnitude, dB Magnitude, Magnitude Squared, Real Part, Imaginary Part, Phase, Unwrapped Phase, Nichols, Nyquist, Polar

Units

V, V², V²/Hz, V/√Hz, meters, meters/s, meters/s², inches, inches/s, inches/s², mils, g, kg, lbs., N, dynes, pascals, bars, SPL, user-defined engineering units (EUs)

Displays

Single, Dual, Front/Back overlay, Waterfall with Skew, Zoom and Pan, Grid On/Off

Marker Functions

Trace Marker, Dual-Trace Linked Marker, Absolute and Relative Marker, Peak Find, Harmonic Marker, Band and Sideband Marker, Waterfall Marker, Frequency-Damping Marker

Windows


Hanning, Blackman-Harris, Flat-Top, Kaiser, Force/Exponential, User-Defined, ±T/2, ±T/4, T/2, Uniform

Source Outputs

Sine, Two-Tone, Swept-Sine, White/Pink Noise, Burst Noise, Chirp, Burst Chirp, and Arbitrary

Averaging

RMS, Vector, Peak Hold, Linear, Exponential, Equal Confidence (Octave), Preview Time Record, % Overlap Averaging, Overload Reject

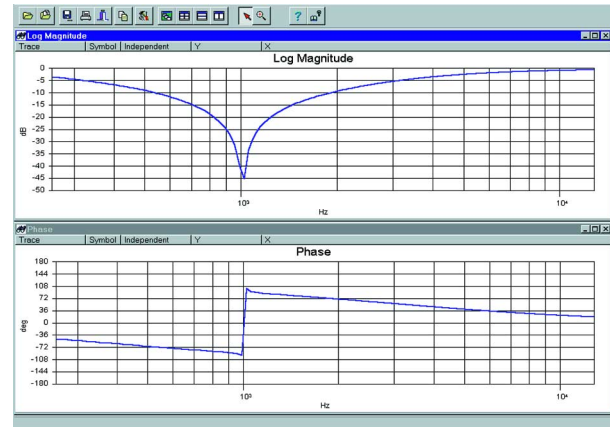

DataViewer software

DataViewer

Windows graphics program for viewing SR785 files. Graphs can be pasted to the clipboard or saved in PCX, BMP or GIF. You can perform simple editing, add pointers and text, change scaling, perform simple math operations, and copy measurement data into other applications.

Data Conversion Utility

Data, waterfall and capture files can be converted to ASCII. Data files can also be converted to Universal File Format, SDF format or MATLAB MAT-File Format. SDF and SR780 files can be converted to SR785 format.

Time Capture

Capture Time Data for later analysis (FFT or Octave). Up to 2 Msamples (8 Msamples optional) of data can be saved.

User Math

+, -, ×, /, Conjugate, Magnitude/Phase, Real/Imaginary, Sqrt, FFT, Inverse FFT, jω, Log, Exp, d/dx, Group Delay, A, B, C Weighting, x/x-1, Trace 1 to 4, Vector Average, RMS Average, Peak Hold

Analysis

Harmonic, Band, Sideband, THD, THD + N, Limit Test with Pass/Fail, Data Table, Exceedance, Statistics, Curve Fit/Synthesis

Triggering

Continuous, Internal, External (Analog or TTL), Source, Auto/Manual Arming, GPIB, RPM Step, Time Step, Pre/Post Trigger Delay



SR785 rear panel

Ordering Information

SR785	Dynamic signal analyzer	\$11,950
O780M1	8 Msample (32 Mbyte) memory	\$800
O780RM	Rack mount kit	\$85
CT100	SRS instrument cart	\$850

Specifications apply after 30 minutes warm-up and within two hours of last auto-offset. Measured with 400-line resolution and anti-alias filters enabled unless stated otherwise.

Measurement Groups

Groups FFT, Correlation, Time Histogram, Swept-Sine, Order Tracking

Frequency

Range 102.4 kHz or 100 kHz (both displays have the same range)
 FFT spans 195.3 mHz to 102.4 kHz or 191 mHz to 100 kHz. The two displays can have different spans and start frequencies.
 FFT resolution 100, 200, 400 or 800 lines
 Real-time bandwidth 102.4 kHz (highest FFT span with continuous data acquisition and averaging)
 Accuracy 25 ppm from 20 °C to 40 °C

Dynamic Range

Dynamic range 90 dB typical, 80 dB guaranteed (FFT and Octave).
 145 dB typical (Swept-Sine).
 Includes spurs, harmonics, intermodulation distortion and alias products. Excludes alias responses at extremes of span.
 Harmonic distortion < -80 dB (single tone in band)
 Intermod. distortion < -80 dB (two tones in band, each less than -6.02 dBfs)
 Spurious < -80 dBfs
 Alias responses < -80 dBfs (single tone outside of span, <0 dBfs, less than 1 MHz)
 Full-span FFT noise floor -100 dBfs typical (input grounded, > -30 dBV, Hanning window, 64 rms averages)
 Residual DC response < -30 dBfs (FFT with Auto-Cal on)

Amplitude Accuracy

Single channel ± 0.2 dB (excluding window effects)
 Cross channel ± 0.05 dB, DC to 102.4 kHz (frequency response measurement, both inputs on the same range, rms averaged)

Phase Accuracy

Single channel ± 3.0 deg. relative to external TTL trigger (-50 dBfs to 0 dBfs, freq. <10.24 kHz, center of frequency bin, DC coupled). For Blackman-Harris, Hanning, Flat-Top and Kaiser windows, phase is relative to a cosine wave at center of time record. For Uniform, Force and

Exponential windows, phase is relative to a cosine wave at beginning of the time record.
 Cross channel ± 0.5 deg. (DC to 51.2 kHz)
 ± 1.0 deg. (DC to 102.4 kHz) (frequency response meas., both inputs on same range, vector avg.)

Signal Inputs

Number of inputs 2
 Full-scale input range -50 dBV (3.16 mVp) to +34 dBV (50 Vp) in 2 dB steps
 Maximum input level 57 Vp
 Input configuration Single-ended (A), differential (A-B)
 Input impedance 1 M Ω + 50 pF
 Shield to chassis Floating mode: 1 M Ω + 0.01 μ F
 Grounded mode: 50 Ω
 Shields grounded in (A-B) mode
 Max. shield voltage 4 Vp
 AC coupling 0.16 Hz cutoff frequency
 CMRR 90 dB at 1 kHz (input range <0 dBV)
 80 dB at 1 kHz (input range <10 dBV)
 50 dB at 1 kHz (input range ≥ 10 dBV)
 ICP signal conditioning Current source: 4.8 mA
 Open circuit voltage: +26 V
 A-weight filter Type 0 tolerance, ANSI standard S1.4-1983; 10 Hz to 25.6 kHz
 Crosstalk < -145 dB below signal (input to input and source to inputs, 50 Ω receiving input source impedance)
 Input noise <10 nVrms/ $\sqrt{\text{Hz}}$ above 200 Hz (< -160 dBVrms/ $\sqrt{\text{Hz}}$)

Trigger Input

Modes Free Run, Internal, External, or External TTL
 Internal Level adjustable to ± 100 % of input scale, positive or negative slope.
 Min. trigger level: 5 % of input range
 External Level adjustable to ± 5 V in 40 mV steps, positive or negative slope.
 Input impedance: 1 M Ω
 Max. input: ± 5 V
 Min. trigger level: 100 mV
 External TTL Requires TTL level to trigger (low <0.7 V, high >3.0 V)
 Post-trigger Measurement record is delayed up to 100,000 samples after the trigger.
 Pre-trigger Measurement record starts up to 8000 samples prior to the trigger.

Tachometer Input

Pulses per revolution 1 to 2048
 RPM accuracy ± 50 ppm (typ.)
 Tach level range ± 25 V, ± 5 V, TTL
 Tach level resolution 20 mV @ ± 25 V, 4 mV @ ± 5 V
 Max. tach input level ± 40 Vp

Min. tach pulse width 100 ns
 Max. tach pulse rate 750 kHz

Transient Capture

Mode Continuous data recording
 Maximum rate 262,144 samples/s for both inputs
 Maximum capture length 2 Msamples (single input)
 8 Msamples with optional memory

Octave Analysis

Standards Conforms to ANSI std. S1.11-1986
 Order 3 Type 1-D and IEC 225-1966
 Frequency range (Band centers)
Single channel
 1/1 Octave 0.125 Hz to 32 kHz
 1/3 Octave 0.100 Hz to 40 kHz
 1/12 Octave 0.091 Hz to 12.3 kHz
Two channels
 1/1 Octave 0.125 Hz to 16 kHz
 1/3 Octave 0.100 Hz to 20 kHz
 1/12 Octave 0.091 Hz to 6.17 kHz
 Accuracy <0.2 dB (1 second stable average,
 single tone at band center)
 Dynamic range 80 dB (1/3 Octave, 2 second stable
 average) per ANSI S1.11-1986
 Sound level Impulse, Peak, Fast, Slow and L_{eq}
 per ANSI S1.4-1983 Type 0 and
 IEC 651-1979 Type 0

Order Tracking

Delta order 0.0075 to 1
 Resolution up to 400 lines
 Amplitude accuracy ± 1 dB (typ.)
 Displays Order map (mag. and phase), order
 track (mag. and phase), orbit

Curve Fit and Synthesis

Type 20 poles/20 zeros curve fit
 (non-iterative rational fraction)
 Order selection Auto or manual
 Output format Pole-zero, polynomial, pole-residue

Source Output

Amplitude range 0.1 mVp to 5 Vp
 Amplitude resolution 0.1 mVp
 DC offset <10.0 mV (typ.)
 Offset adjust ± 5 VDC (sine, swept-sine, two-tone)
 Output impedance <5 Ω , ± 100 mA peak output current

Sine Source

Amplitude accuracy ± 1 % of setting, 0 Hz to 102.4 kHz
 0.1 Vp to 5 Vp into Hi-Z load
 Harmonics, sub-harm. 0.1 Vp to 5 Vp
 & spurious signals < -80 dBc (fundamental <30 kHz)
 < -75 dBc (fundamental <102 kHz)

Two-Tone Source

Amplitude accuracy ± 1 % of setting, 0 Hz to 102.4 kHz,
 0.1 Vp to 5 Vp into Hi-Z load
 Harmonics, sub-harm. < -80 dBc, 0.1 Vp to 2.5 Vp

White Noise Source

Time Record Continuous or burst
 Bandwidth DC to 102.4 kHz or limited to span
 Flatness <0.25 dBpp (typ.), 5000 rms
 averages (<1.0 dBpp (max.))

Pink Noise Source

Bandwidth DC to 102.4 kHz
 Flatness <2.0 dBpp, 20 Hz to 20 kHz (meas-
 ured using averaged 1/3 oct. analysis)

Chirp Source

Time record Continuous or Burst
 Output Sine sweep across the FFT span
 Flatness ± 0.25 dB (1.0 Vp)

Swept-Sine Source

Auto functions Source level, input range and
 frequency resolution
 Dynamic range 145 dB

Arbitrary Source

Amplitude range ± 5 V
 Record length 2 Msamples (playback from arbi-
 trary waveform memory or capture
 buffer). Variable output sample rate.

General

CRT Monitor Monochrome, 800H by 600V res.
 Interfaces IEEE-488.2, RS-232 and printer
 interfaces standard. All instrument
 functions can be controlled through
 computer interfaces. A PC (XT)
 keyboard input is provided for
 additional flexibility.
 Hardcopy Print to dot matrix and PCL
 compatible printers. Plot to HP-GL
 or postscript plotters. Print/plot to
 RS-232 or IEEE-488.2 interfaces or
 disk file. Additional file formats
 include GIF, PCX and EPS.
 Disk 3.5" DOS format, 1.44 Mbytes
 Preamp power Power connector for SRS preamps.
 Power 70 W, 100/120/220/240 VAC,
 50/60 Hz
 Dimensions 17" \times 8.25" \times 24" (WHD)
 Weight 56 lbs.
 Warranty One year parts and labor on defects
 in materials and workmanship